

100%
LED
COMPATIBLE

STACO ENERGY[®] PRODUCTS CO.

FIRSTLINE[®] P924 CATEGORY "OUST" *(Battery Times other than 90 minutes)*

58.5, 72, 90, 112.5, 144, 180, 225 kW

Three-Phase Central Inverter for Emergency Lighting Applications

FirstLine[®] P924 Emergency Lighting System (ELS) delivers high performance, tailored to meet the demands of emergency lighting applications. With a cost-effective reliable design, the FirstLine[®] P 924 helps to ensure personnel safety, during an outage condition.

The FirstLine[®] P 924 offers more security and versatility to meet illumination requirements, and is the perfect complement for all lighting applications. Our inverter technology effectively maintains critical equipment with extended brownout protection, tight voltage regulation, and power conditioning. Tight voltage regulation assures that facility egress lumens are maintained 100% at emergency lighting fixtures, in all modes of operation, and also extends ballast, LED driver, and lamp life.

FirstLine[®] P 924 features unparalleled quality and reliability, with constant conditioned power to virtually any lighting type. The Staco optional Power Distribution Unit (PDU) makes for a well coordinated circuit distribution system.

Up to 98% Efficient

- Lower energy costs and carbon footprint

Compact & Reliable

- Requires either front, top or bottom access, so it can be placed against a wall to minimize footprint
- Cooler operation extends internal component life

AC Input Performance

- High input power factor of 0.99
- Low input current distortion of $\leq 3\%$
- Power walk-in function that ensures progressive rectifier start-up

IGBT and Digital Signal Processor (DSP)

- Reduces the impact of the ELS on the local supply
- Simplifies installation where there is limited power capacity in the form of available electrical supply rating or generator size

Dual input

- Main power and secondary emergency standby power increase resilience of single or parallel system configuration

High Performance Filter

- Protects upstream power supply sources from harmonics and reactive power generated by the loads power

Menu Select Display

- User friendly display is easy to see and intuitive to use

Worldwide Service Program

- Factory trained service personnel maximize equipment life
- Full start-up service & preventive maintenance lowers cost of ownership



**Full Two Year
Warranty**

www.stacoenergy.com

Your Tailored Power Solutions Provider™



Applications

- Theaters / Concert Halls
- Auditoriums
- Worship Facilities
- Conference / Banquet Centers
- Shopping Malls
- Casinos
- Sports Facilities
- University Buildings
- Healthcare Facilities
- Correctional Facilities
- Subway / Train Stations

In addition to meeting life safety requirements, the FirstLine® P 924 Emergency Lighting System can also increase the life expectancy of the protected lighting system and reduce long-term cost of ownership.

FIRSTLINE® P 924

Three-Phase Central Inverter for Emergency Lighting Applications

In the event of an AC power failure, FirstLine® P 924 ELS automatically supports the connected lighting loads on battery power and will continue to provide power without any interruption for the specified backup time. When the utility power returns to normal, FirstLine® P 924 ELS will automatically recharge the batteries to be ready for the next power disturbance.

AC Input Performance

FirstLine® P 924 is a further evolution of the FirstLine® series with the added advantages offered by an IGBT-based rectifier/inverter assembly. This feature reduces the impact of the ELS on the local supply and simplifies installation where there is limited power capacity in the form of available electrical supply rating or generator size. FirstLine® P 924 is classed as a “Zero Impact Source” and provides:

- Low input current distortion— $\leq 3\%$
- High input power factor 0.99
- Power walk-in function that ensures progressive rectifier start up
- Delayed start up phased with the return of mains power supply.

FirstLine® P 924 also performs the role of a high performance filter, protecting its upstream power supply sources from any harmonics and reactive power generated by the loads powered.

Flexibility

FirstLine® P 924 models feature an output transformer with galvanic isolation (between the load and the battery supply) to provide greater versatility and installation options. The ELS can be supplied from two separate power sources (main power and a second emergency standby source) which helps increase the reliability.

Main Characteristics

- Efficiency up to 98%
- Reduced weight
- Double electronic and galvanic protection of the load from the battery


The entire FirstLine® P 924 range is suitable for a wide range of applications thanks to the flexibility of configurations, accessories, options, and choice of performance levels.

The ELS is compatible with capacitive loads, such as blade servers, without any reduction in active power, ranging from 0.9 lead to 0.8 lag and up to 0.8 capacitive power with a low derating equal to 15% of the active power (kW).

Battery Care System

FirstLine® P 924 uses the Battery Care System which optimizes battery performance while extending battery life.

Front Panel Display

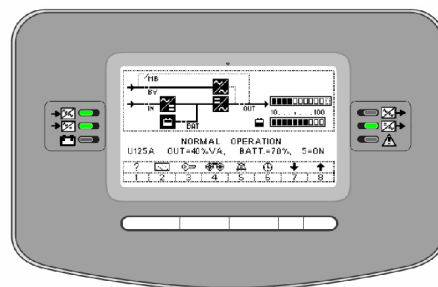

Electrical Specifications

Electrical Data	ELS Power (kW)						
	58.5	72	90	112.5	144	180	225
INPUT							
Nominal voltage	480Vac 3 phase, 3 or 4-Wire + Grd. (208V with Transformer)						
Nominal voltage range without battery contribution	-10%, +15%						
Voltage range in battery mode	-40%, +15%						
Input frequency range	From 45 to 65Hz						
Nominal current absorbed (480V)	76	94	118	147	188	235	294
Maximum current absorbed at full load and battery recharging (Amps)	89	109	136	160	212	265	331
Power factor at nominal voltage (480 V) and battery charged from 25% to 100% of the load	>0.99						
Current Harmonic distortion (THDi) (with mains distortion <2%)							
• load 100%	≤ 3%						
• load 75%	≤ 5%						
• load 25÷50%	≤ 8%						
Progressive rectifier (Walk-in)	from 0 to 30 seconds (configurable)						
Delay of Progressive start of rectifier (Power Walk-in delay timer)	from 0 to 120 seconds (configurable)						
D.C. INTERMEDIATE CIRCUIT							
Number of cells	240						
INVERTER							
Static variation	± 1%						
Dynamic variation	± 5%						
Crest Factor	3:1						
Voltage distortion with linear load	1% (typical), 2% (max)						
Voltage distortion with non-linear load	< 3%						
Frequency stability with synchronized inverter to the by-pass network.	± 2% (± 1% to ± 6% from control panel)						
Frequency stability with not synchronized inverter to the by-pass line	± 0.05%						
Speed of frequency variation	1Hz/sec (parallel units can be calibrated from 0.1 to 1Hz/s)						
Phase voltage asymmetry with balanced and unbalanced load.	≤ 1%						
Phase displacement of the voltages with balanced and unbalanced loads.	120 ± 1 °el						
Overload in referred to the nominal power	110% for 60 minutes, 125% for 10 minutes, 150% for 1 minute 200% for 7 seconds						
• Three phase							
• Single phase							
Inverter efficiency	95%						
BY-PASS							
Nominal voltage	480Vac 3-phase (with or without neutral)						
Nominal voltage tolerance	± 15% (can be regulated from ± 10% to ± 25% from the control panel)						
Nominal frequency	60 Hz						
Frequency tolerance	± 2% (can be regulated up to ± 6% from the control panel)						
SYSTEM							
AC/AC efficiency at full load	93 %						
Efficiency with UPS in STAND-BY mode	98 %						
Full Load Heat Rejection BTU/hr	15,033	18,500	23,120	28,900	37,009	46,262	57,827
Maximum current dispersion	300mA maximum						
Battery	Any specified battery time other than 90 minutes per Category "OUST".						
MECHANICAL							
Dimensions	ELS Power (kW)						
	58.5	72	90	112.5	144	180	225
Height x Width x Depth – inches (mm)	–			75 (1900) x 39.5 (1003) x 33.5 (822)			
Weight – lbs. / Kg	–	–	–	–	1,984 / 900	2,205 / 1,000	2,425 / 1,100
Mechanical with internal bypass							
Height x Width x Depth – inches (mm)	75 (1900) x 31.5 (800) x 33.5 (850)				75 (1900) x 55 (1397) x 33.5 (822)		
Weight – lbs. / Kg	1,213 / 550	1,213 / 550	1,433 / 650	1,544 / 700	2,326 / 1,055	2,546 / 1,154	2,767 / 1,255
Freestanding NEMA 1 enclosure, powder coat painted black color with textured finish, bottom access for conduit entries							
ENVIRONMENTAL							
Ambient temperature	0° C to 40° C						
Storage temperature	-25° C to 70° C						
Relative humidity	20 – 90% non-condensing						
Altitude	3,281 feet without derating						
Audible noise	65 dBA @ 1 meter				68 dBA @ 1 meter		
OPTIONS							
Refer to the Product Specification							
AGENCY LISTING							
UL 924 listed as "Emergency Lighting Equipment" and "Auxiliary Lighting and Power Equipment". Complies with NFPA 101 Life Safety Code.							

ELS Model Numbers

ELS Model #	kW	Dimensions (H" x W" x D")	Weight (Lbs.)
FLU-P-924-58-OST	58.5kW	75 x 31.5 x 33.5	1,500
FLU-P-924-72-OST	72kW	75 x 31.5 x 33.5	1,500
FLU-P-924-90-OST	90kW	75 x 31.5 x 33.5	1,610
FLU-P-924-112-OST	112.5kW	75 x 31.5 x 33.5	1,750
FLU-P-T-924-144-OST	144kW	75 x 55 x 33.5	2,330
FLU-P-T-924-180-OST	180kW	75 x 55 x 33.5	2,550
FLU-P-T-924-225-OST	225kW	75 x 55 x 33.5	2,770

58.5kW – 112.5kW Input/Output Transformer

Model #	kVA/kW	Input/Output Voltage	Dimensions (H" x W" x D")	Weight (Lbs.)
FLU-P-XXX-TC-2Y-2Y	65/58.5 80/72 100/90 125/112.5	208Y/120 208Y/120	75 x 33.5 x 33.5	1,760
FLU-P-XXX-TC-4Y-2Y	65/58.5 80/72 100/90 125/112.5	480Y/277 208Y/120	75 x 33.5 x 33.5	1,130

144kW – 225kW Input Transformer

Model #	kVA/kW	Input/Output Voltage	Dimensions (H" x W" x D")	Weight (Lbs.)
FLU-P-XXX-ITC-2Y	160/144 200/180 250/225	208Y/120	75 x 35 x 33.36	1,130 to 2,400

144kW – 225kW Output Transformer (K20)

Model #	kVA/kW	Input/Output Voltage	Dimensions (H" x W" x D")	Weight (Lbs.)
FLU-P-XXX-OTC-2Y-2	160/144 200/180 250/225	208Y/120	75 x 35 x 33.36	1,130 to 2,400

58.5kW – 225kW External Bypass (Make-Before-Break)

Model #	kVA/kW	Input/Output Voltage	Dimensions (H" x W" x D")	Weight (Lbs.)
FLU-P-XXX-MBPS	ALL	480Y/277	75 x 15.75 x 33.5	300

58.5kW – 112.5kW External Bypass (Make-Before-Break)

Model #	kVA/kW	Input/Output Voltage	Dimensions (H" x W" x D")	Weight (Lbs.)
FLU-P-XXX-TC-2Y-2Y-MBPS	65/58.5 80/72 100/90 125/112.5	208Y/120	75 x 33.5 x 33.5	1,870
FLU-P-XXX-TC-4Y-2Y-MBPS	65/58.5 80/72 100/90 125/112.5	480Y/277 208Y/120	75 x 33.5 x 33.5	1,240

Replace the XXX with the unit kVA rating

Battery Cabinet(s)

Number and dimensions vary depending on required back up time – Consult Factory

Two Year Warranty

Electronics:

A full **Two Year On-site Warranty** (Continental U.S.)

Battery:

Three (3) Year Full, Limited Warranty,

on the Battery System ensures that your batteries are protected from system failure now and in the future. (Warranty provided by battery manufacturer. Extended warranties, customized service plans and preventative maintenance are also available. Please refer to our warranty statement for complete details.

Standards

- | Safety UL 924 and CE Listed - Emergency Lighting - Auxiliary Lighting and Power Equipment NFPA 101, 111, NEC, and local codes
- | CE
- | NEMA PE-1
- | ASME
- | ASA-C-39.1-1984
- | FCC PT 15, Subpart J, Class B
- | National Electrical Code
- | OSHA
- | IEEE 587 ANSI C 62.41-1980
- | ISO 9001
- | IBC (International Building Code) Ratings A-F, Site Specific



Staco Service Field Service Program

Staco specializes in providing choice and flexibility by developing tailored solutions for preventive and remedial maintenance services, as well as emergency repairs for all of our products. Staco Service is built upon a nationwide network of highly trained and motivated customer support engineers and technicians who can provide professional services and care throughout the life of your equipment.

- n **Start-Ups**
- n **Preventive Maintenance**
- n **Spare Parts**
- n **Battery Analysis/Refresh/Replacement**
- n **On-Site Training**
- n **Time & Material Services**

Why Staco Energy Products?

Because we are your tailored power solutions provider!

Unique application design demands, harsh environment concerns, the need to meet non-standard physical space requirements—providing the “not so usual” is what we do best. From leading edge uninterruptible power supplies, power conditioners, power factor and harmonic correction equipment, to the world’s most stable voltage control systems, we have the technology you need to protect and manage your business, and the knowledge to make it work for you.

Since 1937, customers worldwide have relied on Staco Energy as their tailored solutions provider, to solve a wide range of electrical power problems. Headquartered in Dayton, Ohio, Staco Energy Products is a wholly owned subsidiary of Components Corporation of America, located in Dallas, Texas.



Your Tailored Power Solutions Provider™

Contact Us:
US Toll Free: 866-261-1191
Phone: 937-253-1191
E-mail: sales@stacoenergy.com